

 Barlinek

NEXT STEP

waterproof hybrid floors



the naturalness of wood with the resistance of stone

barlinek.com

real wood, resistance of stone

BARLINEK is constantly looking for the safest solutions for health and the environment.

NEXT STEP HYBRID FLOORING is a collection where the wear layer is extracted from real wood and the core is made of a mineral composite. The final product are highly durable, long-lasting and **WATERPROOF FLOORS**.



mineral core

ULTRA HARD LACQUER
topcoat highly resistant to abrasion



REAL WOOD
deep grain structure



DENSCORE™
waterproof mineral core



BACKPRESSURE LAYER

The **DENSCORE™** core makes **BARLINEK HYBRID FLOORS** very durable and water resistant. With their high heat transfer coefficient, the floors after gluing are ideal for underfloor heating and cooling systems.



Barlinek hybrid floorboards



Brushed finish

BRUSHING

This is a modern method to highlight the beauty of natural wood – its grain and structure. The texture of the brushed floor can be felt when touched.



Micro-bevelling

BEVELLING

It consists of a gentle bevelling of the edges to visually distinguish individual boards and to give them the effect of a real wooden floor.



Matt topcoat

ULTRA-RESISTANT LACQUER

Ensures durability and resistance of the floor during intense use.

Our new floors have all the benefits of wood flooring, providing additional resilience.



Ultra hard topcoat

The surface of **HYBRID FLOORS** is completely resistant to the most common types of stains: red wine, olive oil or acetone.

The hardness of the entire ceramic coating is achieved with several layers of the topcoat with an admixture of **CORUNDUM** for protection against wear, even when frequently used. Thanks to this, **BARLINEK HYBRID PLANKS** can be used not only in residential rooms, but also in hotels and other public spaces, such as offices and conference rooms.

The structure of the **ULTRA HARD** topcoat also reduces the risk of slipping in bathrooms, kitchens and spa rooms.



Safe flame-retardant flooring



Human- and environmentally-friendly flooring



Safe anti-slip flooring



Low VOC and formaldehyde emission levels

wooden wear layer


Bigar oak

1H100009

The antique colour gives new opportunities for interior design. The colour depth and the warm tone harmonize perfectly with rich furnishings and the diversity of accents. The abundance of vegetation brings even more life to the whole room.



CORE
DENSCORE™

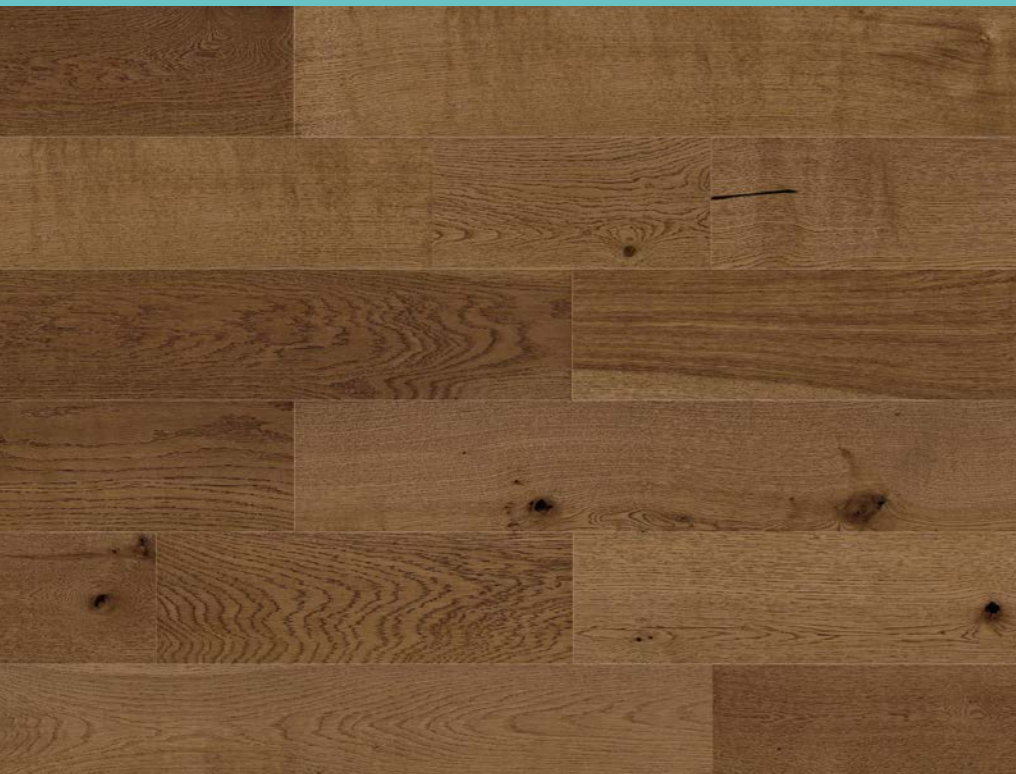

waterproofness*

Kukenaam oak

1H1000002

The floors are coloured in a trendy, grey tone, forming a perfect canvas for many different interior styles. The wood grain texture provides the space with a sense of elegance and refinement. It perfectly matches classic interiors, beautifully harmonising with fashionable floral patterns.



CORE
DENSORE™



12

13



ultra-resistant topcoat


Kalambo oak

1H1000003

The airy feel about this grey floor makes the interior brighter for unlimited design opportunities. In an open space, this colour is perfect for a modern kitchen and a fashionable dining room. The whole enthuses modern elegance.



CORE
DENSCORE™

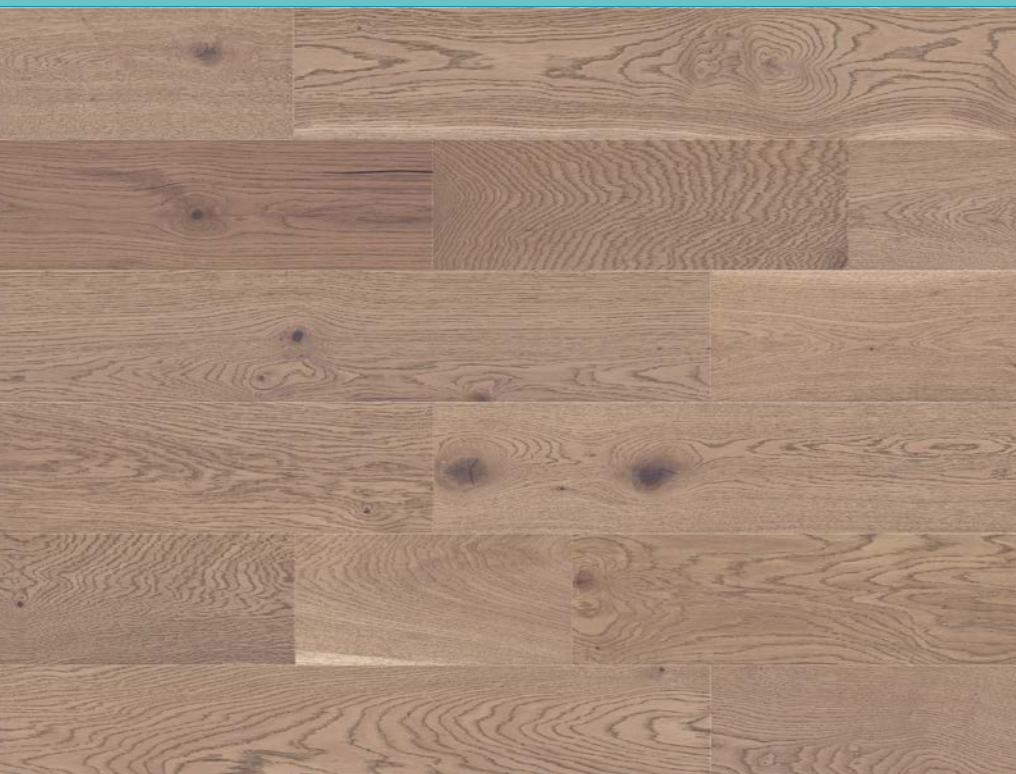

stable design


Ribbon oak

1H1000001

The white colouring makes the interior feel light and smooth. The wood grain provides a natural style in the room. A perfect canvas for designs with contrasting blacks or deep greys. Organic accessories, glass or stone will work perfectly.



CORE
DENSCORE™

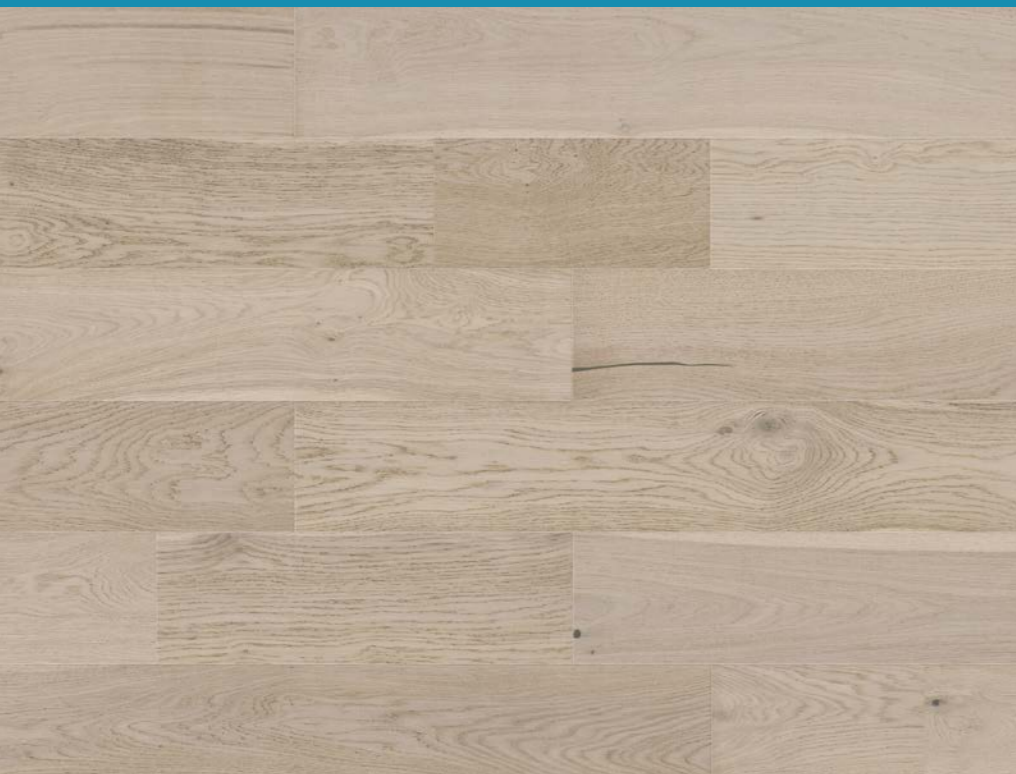

16

17



safety

Niagara oak

1H100007

The dark honey shade of the floors is beauty and class. The interior is complemented by elegant furnishings and top quality details. Ideal space for an elegant dinner, but also the best playground for children.



CORE
DENSCORE™



18

19



underfloor heating


Della oak

1H100005

This flooring colour is reminiscent of raw timber. The fully natural character is complemented by tones of grey and the clashing bathroom fittings in black. The whole builds an air of superior comfort.



CORE
DENSCORE™

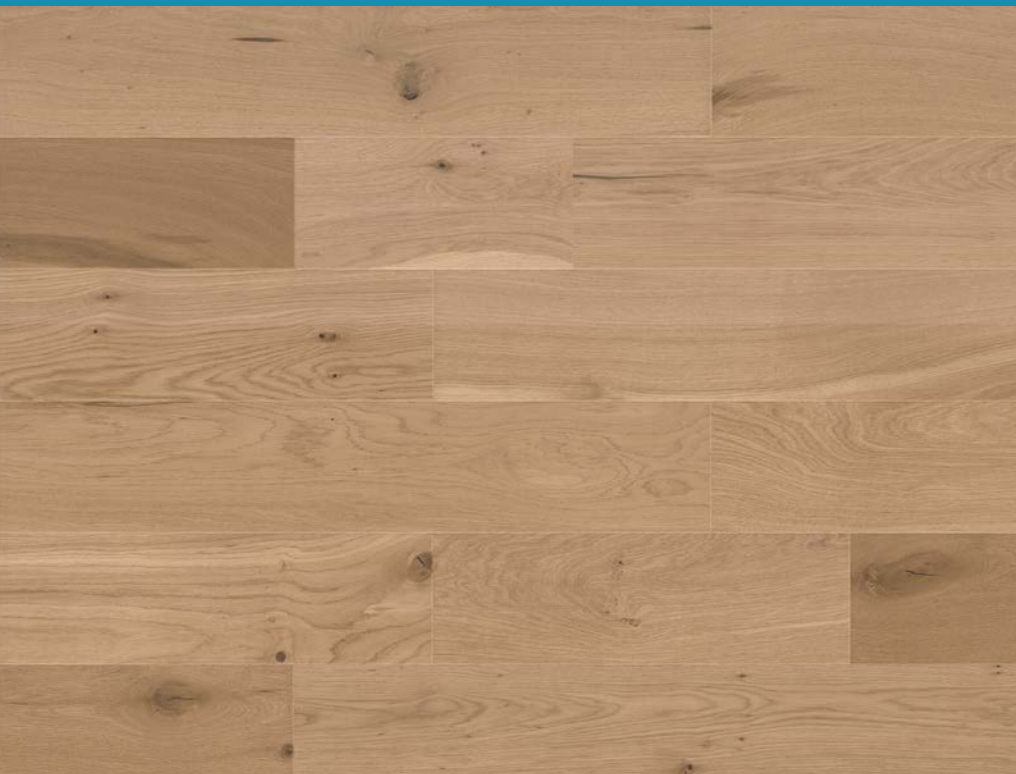

silent use


Lofoi oak

1H1000004

The creamy shade of the flooring makes the space feel incredibly cosy. The warm colour of the top layer breaks gently with the austerity of concrete and the cold tones of the finish. The ideal minimalist interior, harmonious and spacious.



CORE
DENSCORE™

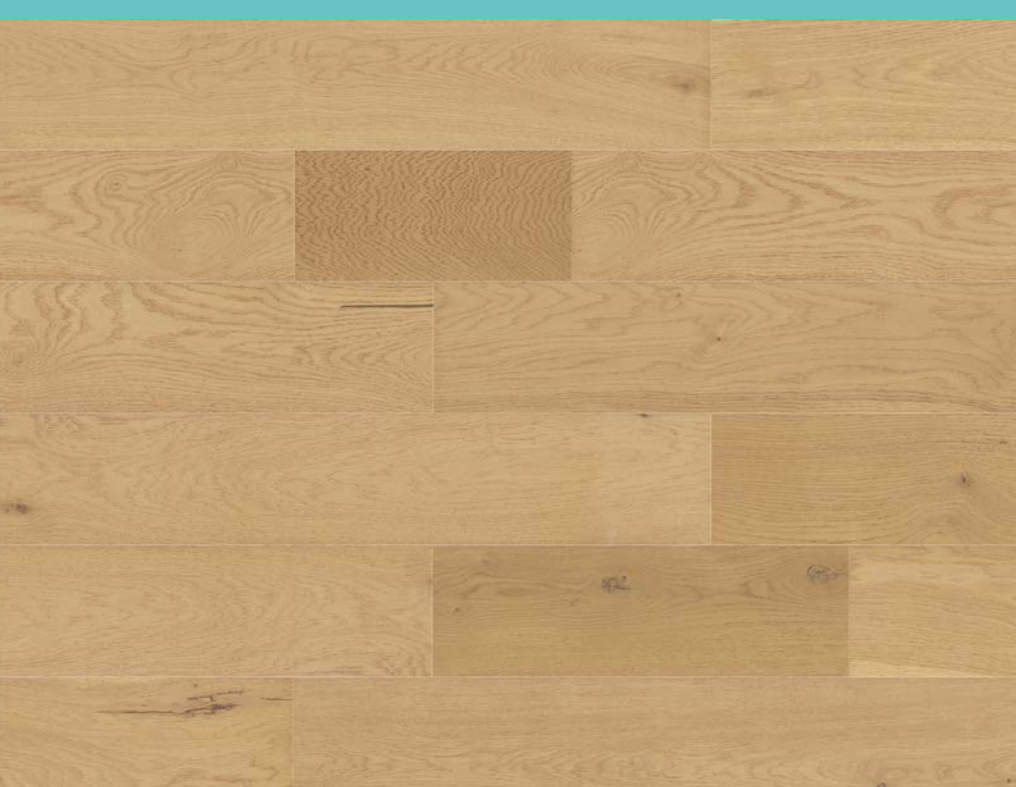

safe for pets


Inga oak

1H1000008

A traditional brown flooring is a refined interior piece in the spirit of Art Deco. A large space, a monumental mirror, and sophisticated artwork are not to be skipped here. This unique interior style combines high aesthetics and beauty.



CORE
DENSCORE™

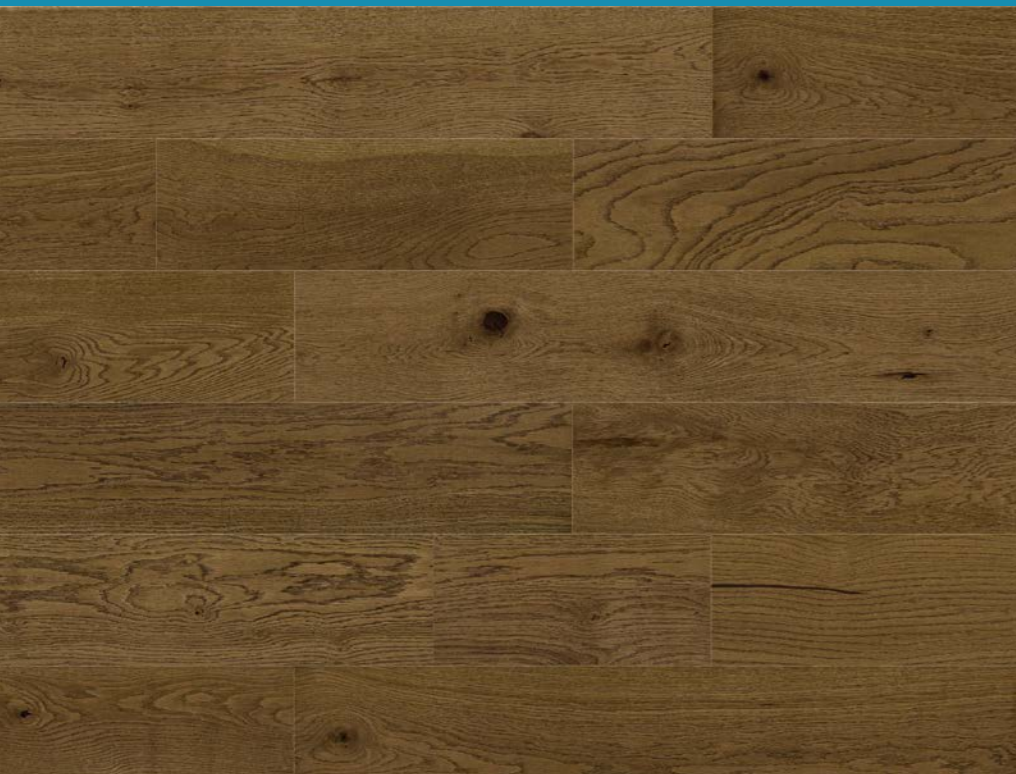

clean and easy to install


Tugela oak

1H100006

The warm tone of the flooring adds a unique, grand touch. Brings charm with its colour and adds glamour to retro or vintage-themed interiors. An open space is the perfect alternative for those who love freedom and vivid colours.



CORE
DENSCORE™

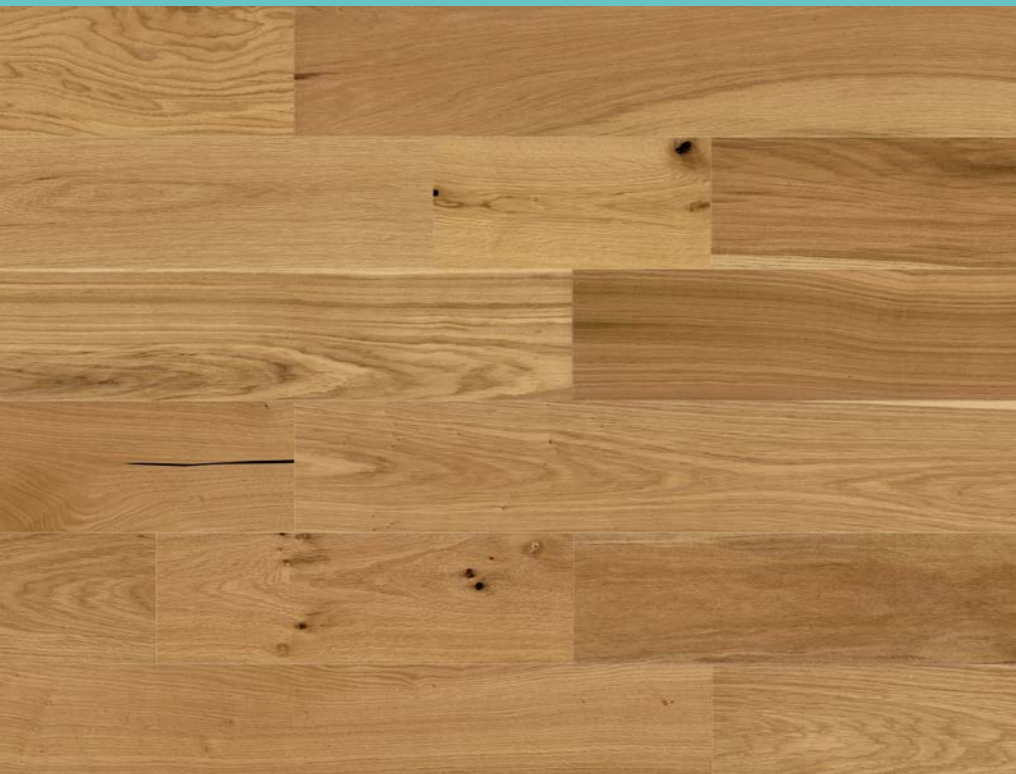

30 years warranty


Mackay oak

1H1000010

The walnut tone of the flooring with the decorative texture and natural grain builds warm spaces. A variety of materials and textures are used here. Ethnic accessories will enhance and complement the design. Its eclectic style allows you to freely combine many conventions.



CORE
DENSCORE™

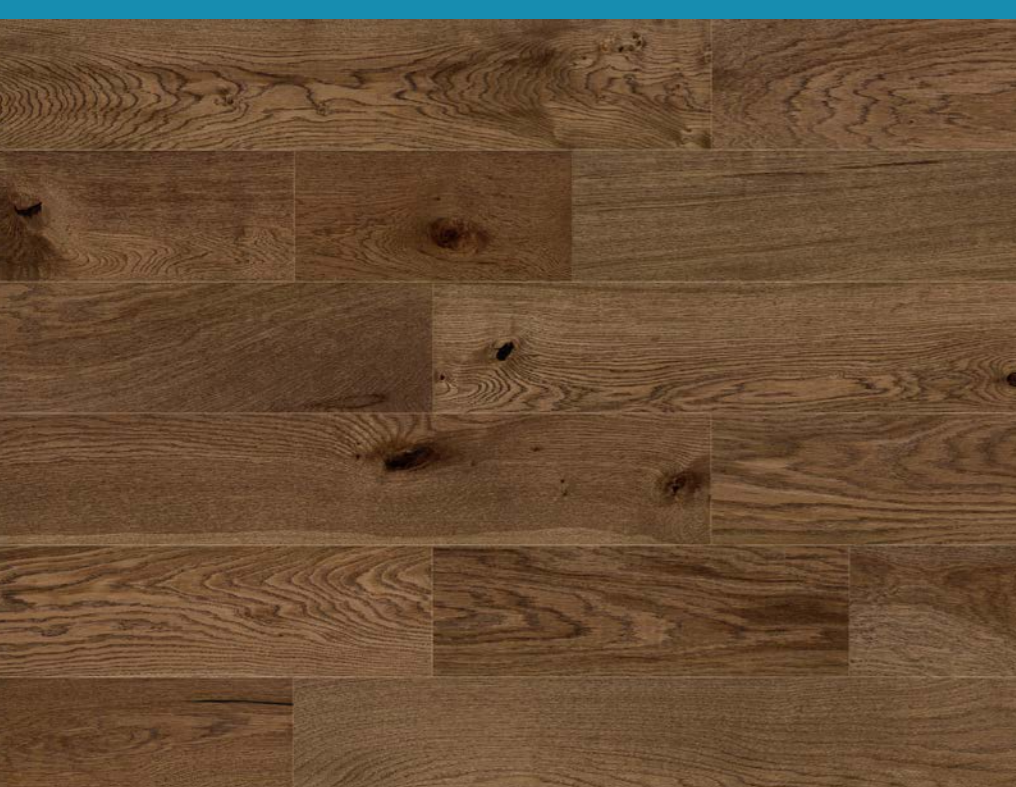

advantages of Barlinek hybrid floors



WOODEN WEAR LAYER

The top layer of the floors is a natural oak veneer. Our new products have all the benefits of wood flooring, providing additional resilience.



WATER RESISTANCE*

Hybrid flooring ensures resistance to flooding and water splashes. It makes a perfect choice for kitchens, hallways and even bathrooms, and makes it possible to have identical floors throughout your home.



ULTRA-RESISTANT LACQUER

The top layer of wood is coated with a highly abrasion-resistant Ultra Hard topcoat. The coating consists of several layers of lacquer reinforced with alumina (aluminum oxide) for extra strength.



STABLE STRUCTURE

Even if installed on very large areas, the flooring requires no door threshold or intermediate expansion joints. Now you can use the same flooring in rooms of different use, forming smooth transitions between the kitchen and the living room or between the hallway and the bathroom.

*Waterproof flooring means that the product is not susceptible to temporary exposure to water. See the detailed specifications in the Installation Instructions, the Warranty Certificate, and the Next Step Flooring Requirements for Use.



SAFETY

The floors are A+ certified, as a proof of very low emissions of VOC (volatile organic compounds). The core of the **DENSCORE™** board is a mineral blend that does not contain any harmful phthalates or heavy metals.



UNDERFLOOR HEATING

After gluing, hybrid flooring is perfect for installing over underfloor heating and cooling systems.



SILENT USE

Combined with **EXTREME 1.5** soundproof underlay Barlinek hybrid floorboards ensure excellent sound absorbing properties.



SAFE FOR PETS

Ultra Hard lacquer and **DENSCORE™** core provide increased resistance to abrasion and scratches. It is also a guarantee of easy maintenance of an apartment or a house.



CLEAN AND EASY TO INSTALL

Laying a floating flooring system does not require special tools and can be completed without unnecessary dust!



30 YEAR WARRANTY

Next Step hybrid floors are designed to last for many years and look beautiful, especially when using Barlinek maintenance products.




Bigar oak
1H1000009

Baseboard height 60 mm
Bigar Oak P6P01472A



Kukenaam oak
1H1000002

Baseboard height 60 mm
Touch Oak P6P01242A

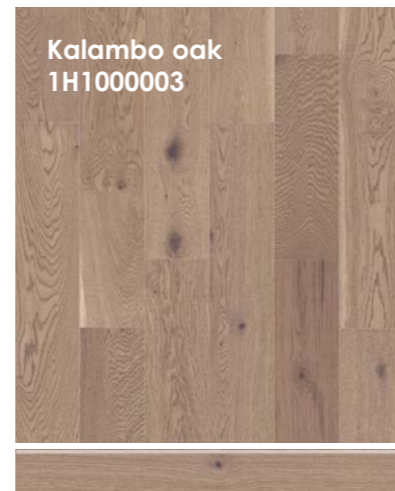


Kalambo oak
1H1000003

Baseboard height 60 mm
Kalambo Oak P6P01492A




Ribbon oak
1H1000001

Baseboard height 60 mm
Gentle Oak P6P01312A

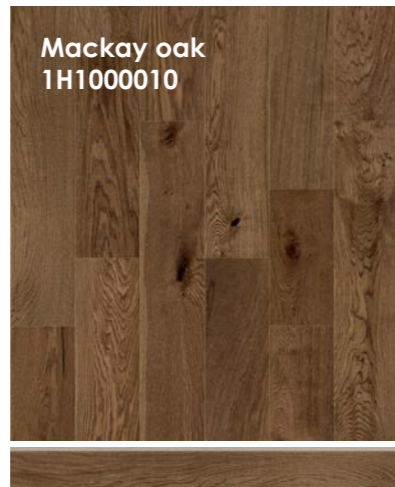

Mackay oak
1H1000010

Baseboard height 60 mm
Mackay Oak P6P01482A

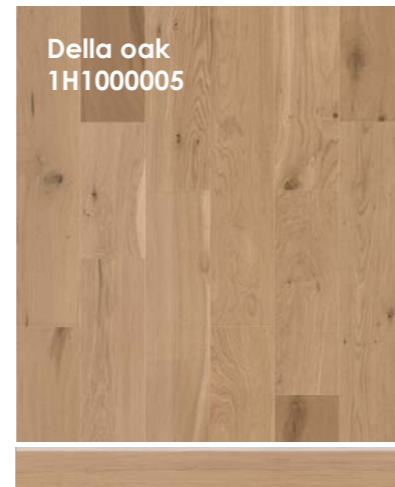

Della oak
1H1000005

Baseboard height 60 mm
Harmony Oak P6P01342A




Lofoi oak
1H1000004

Baseboard height 60 mm
Harmony Oak P6P01342A



Niagara oak
1H1000007

Baseboard height 60 mm
Still Oak P6P01422A

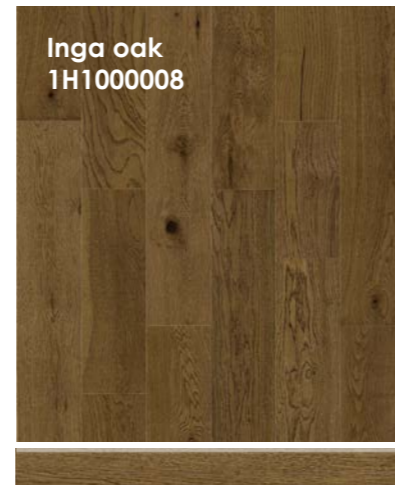

Inga oak
1H1000008

Baseboard height 60 mm
Terra Oak P6P01212A



Tugela oak
1H1000006

Baseboard height 60 mm
Lacquered Oak P6P01011A

parameters of BARLINEK HYBRID FLOORBOARD

oak veneer:	1 mm
stone polymer composite core:	6 mm
floor thickness:	7 mm
width:	190 mm
length:	400-1200 mm

Wood is a natural material, distinguished by the lack of repetitive patterns. The individual photographs of the floorboards in this catalogue may not accurately represent the true appearance of the products. The actual product colour ordered may vary from the colour samplers available at the point of sale.

the natural complement to hybrid floors



Barlinek baseboards are the finishing showpiece of the hybrid floor. 100% wood, lacquered and colour matched to the HYBRID FLOORS.

underlay EXTREME 1.5



- protects floor joints
- absorbs noise
- is perfect for underfloor heating systems
- environmentally friendly



we act green

Since the very start of our business, we have been committed to many eco-friendly initiatives, e.g. the tree planting programme.

As a leading supplier of floors, we are also aware of the importance of a sustainable manufacturing process for saving the natural forestry resources.

HYBRID FLOORING is another step in Barlinek's growth that combines modern design, excellent product performance and environmental concerns.



We plant one tree for each package of Barlinek floorboards.



Saving the Peregrine Falcon.



The "Barfek" Oak Tree in our care.



Barlinek
**NEXT
STEP**

Barlinek S.A.
al. Solidarności 36,
25-323 Kielce, Poland
Phone: +48 41 333 11 00
Fax: +48 41 333 00 00
e-mail: info@barlinek.com.pl

barlinek.com